


# ANR-J190/J180N2-C612

Intel® Celeron® Bay Trail J1900/J1800 Networking 1U Rackmount,  
6 x GbE LANs



## Features

- Intel® Celeron® Bay Trail J1900/J1800
- 1 x 204-pin DDR3L-1600 MHz, 1 x SO-DIMM Slot, Up to 8GB
- 6 x GbE, 2 x USB
- 1 x Mini PCIe Expansion
- 8 x GPIO
- 1 x COM (internal header)



CE FC

## Power Requirement

Power Input	Internal 250W power supply, input range 100V AC 60Hz ~ 240V AC 50Hz
-------------	---

## Software

OS Support	1. Windows 7 (32/64-bit) 2. Linux Kernel 3.11 (32/64-bit)
------------	--

## Mechanical & Environment

Dimension	440 x 250 x 45 mm
Operating Temp.	0~40°C
Storage temp.	-20~80°C

## Specification

### System

CPU	1. Intel® Celeron® Bay Trail J1900, Quad-core, clock speed 2.00GHz 2. Intel® Celeron® Bay Trail J1800, Dual-core, clock speed 2.41GHz
Memory	1 x 204-pin SO-DIMM socket support 1600MHz DDR3L up to 8GB
BIOS	AMI UEFI
WatchDog Timer	Software programmable 0~255 sec.

### Video

Graphic Controller	Integrated graphics support for processors with Intel Graphics Technology
Video Interface	1 x VGA (1 x internal header)

### Ethernet

Chipset	6 x Intel GbE chip
Connector	6 x RJ45 with LED
Bypass LAN	Yes (2-pair: LAN3&LAN4, LAN5&LAN6)


### Storage

SATA	1 x SATAII port
Compact Flash	1 x Compact Flash Type II socket
HDD Bay	1 x 2.5" HDD Bay


### I/O

Expansion	1 x Mini PCIe socket
Console Port	1 x Console (1 x RJ45)
USB	2 x USB 2.0

## Dimension

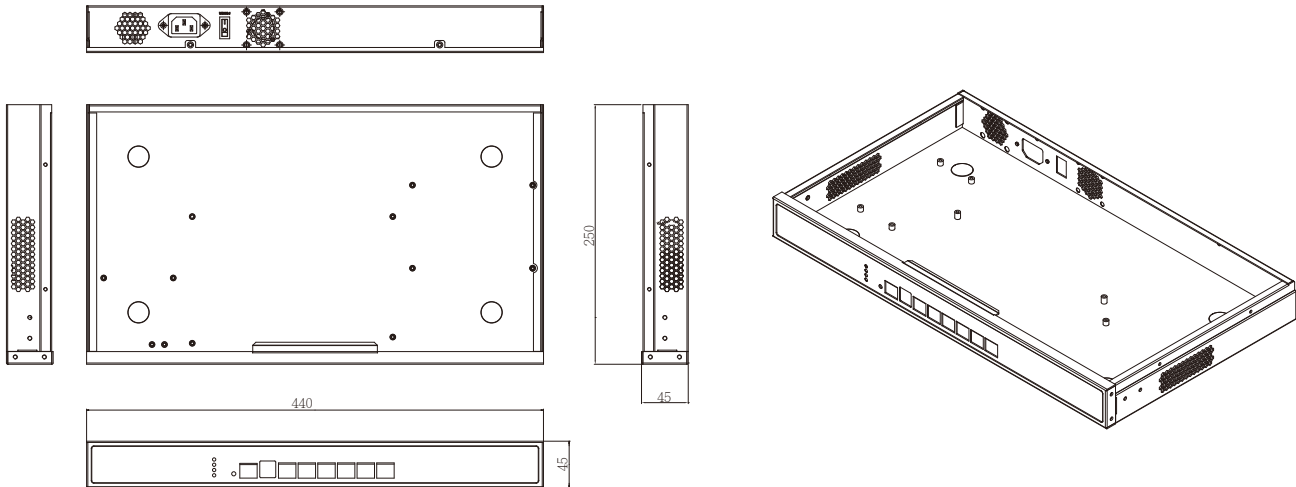

## I/O Connectors

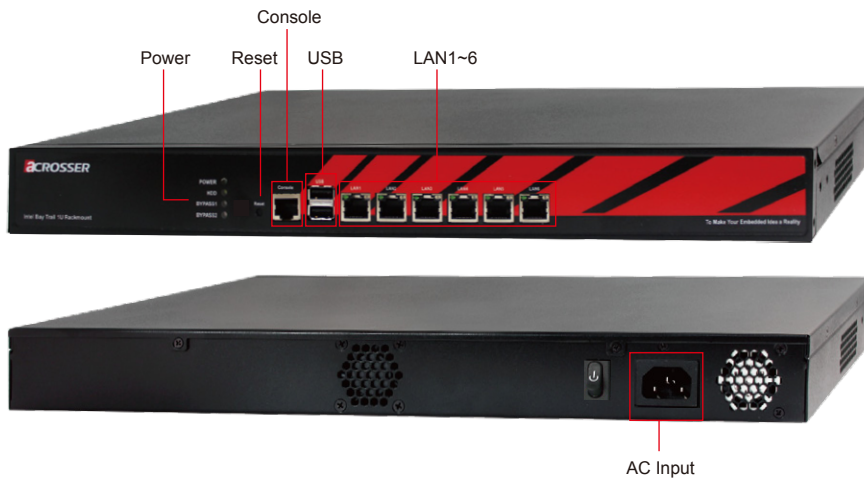

ANR-J190/J180N2-C612

### Packing List

- 1 x ANR-J190/J180N2-C612 system
- 1 x Driver CD
- 1 x Console Cable (DB9)
- 1 x SATA Cable
- 1 x SATA Power Cable
- 2 x Bracket Ears
- 1 x Power Cord (Option for USA/UK/EU/JPN/AU/RSA/IND)

### Option

- |                 |   |
|-----------------|---|
| ANR-J190N2-C612 | 2GB DDR3L-1600 memory (non-ECC SO-DIMM) |
| ANR-J180N2-C612 | 4GB DDR3L-1600 memory (non-ECC SO-DIMM) |
|                 | 8GB DDR3L-1600 memory (non-ECC SO-DIMM) |

### Ordering Information

- |                 |  |
|-----------------|--|
| ANR-J190N2-C612 | Intel® Celeron® Bay Trail J1900/J1800 Networking               |
| ANR-J180N2-C612 | 1U Rackmount, DDR3L, GbE, USB 2.0, SATA II, CF, Mini PCIe PCIe |